




**Brand: BendPak**  
**Models: XP-15C / XP-18C**  
**Description: Super-Duty Clearfloor Two-Post Lift**

- 15,000 – 18,000 pound lifting capacity.
- Dual hydraulic “direct-drive” cylinders.
- Electric/hydraulic power system.
- Large, oversize, 3/4” thick, A36 steel base plate.
- Single-point safety-lock release.
- Oversize 53” tall carriage for superior strength and durability.
- Self-lubricating, dura-glide polyethylene bearing system.
- Safety locks in each column spaced every 3-inches.
- Automatic arm restraints.
- Heavy-duty dual equalizer cables.
- Padded overhead safety-shutoff bar.
- Durable, rubber lift pads with stackable adapters.
- Truck and van adapters standard.

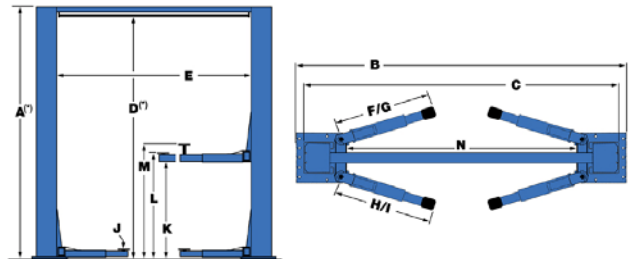

MODEL	XP-15C	XP-18C
Lifting Capacity*	15,000 Lbs. / 6804 Kg.	18,000 Lbs. / 8165 Kg.
*Max Capacity / Front Axle	7,500 Lbs. / 3402 Kg.	9,000 Lbs. / 4082 Kg.
*Max Capacity / Rear Axle	7,500 Lbs. / 3402 Kg.	9,000 Lbs. / 4082 Kg.
<b>A</b> - Height Overall: (*)	170" / 4318 mm.	170" / 4318 mm.
<b>B</b> - Width Overall (Outside of Base Plate):	155" / 3937 mm.	155" / 3937 mm.
<b>C</b> - Width (Outside of Columns):	144" / 3658 mm.	144" / 3658 mm.
<b>D</b> - Floor To Overhead Switch: (*)	165" / 4191 mm.	165" / 4191 mm.
<b>E</b> - Inside Columns:	120" / 3048 mm.	120" / 3048 mm.
<b>F</b> - Reach (Front Arm Min.):	39" / 991 mm.	39" / 991 mm.
<b>G</b> - Reach (Front Arm Max.):	59" / 1499 mm.	59" / 1499 mm.
<b>H</b> - Reach (Rear Arm Min.):	39" / 991 mm.	39" / 991 mm.
<b>I</b> - Reach (Rear Arm Max.):	59" / 1499 mm.	59" / 1499 mm.
<b>J</b> - Min. Pad Height:	5" / 127 mm.	5" / 127 mm.
<b>K</b> - Rise:	69" / 1753 mm.	69" / 1753 mm.
<b>L</b> - Max Lift Height (Pad Only):	74" / 1880 mm.	74" / 1880 mm.
<b>M</b> - Max Lift Height (6" Adapter):	80" / 2032 mm.	80" / 2032 mm.
<b>N</b> - Drive-Thru Clearance:	106" / 2692 mm.	106" / 2692 mm.
Motor (**)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.
Time of full Rise:	45 Seconds	45 Seconds
Max Load Per Arm:	3,750 Lbs. / 1701 Kg.	4,500 Lbs. / 2041 Kg.

\* An optional bolt-on top extension for columns raises the overhead bar an additional 24". Must be ordered from factory at time of order.

\*\* Special Voltages Available Upon Request.  
 The design, material and specifications are subject to change without notice.